

使用者手冊

行車紀錄器

DrivePro 50

(Version 1.3)



目錄

1.	產品介紹	2
2.	系統需求	2
3.	注意事項	3
3-1	一般使用	3
3-2	安裝位置	3
3-3	資料備份	3
4.	產品概觀	4
4-1	功能鍵	4
4-2	LED 指示燈	5
4-3	插入記憶卡	5
4-4	安裝 DrivePro 行車記錄器	6
4-5	連接電源	7
5.	錄影功能	8
5-1	緊急錄影	8
6.	安裝 DrivePro App	9
6-1	下載與安裝 App	9
6-2	連線 DrivePro App	9
6-3	播放影片	10
iOS	10
Android 系統	12
6-4	裝置設定	14
7.	傳輸檔案至電腦	15
8.	DrivePro Toolbox™ 軟體	16
9.	包裝內容	18
10.	產品規格	19
11.	常見問題	20
12.	回收和環保	21
13.	美國聯邦通信委員會 (FCC) 聲明	22
14.	兩年有限保固條款	23
15.	GNU 通用公共授權條款 (GPL) 公告	24
16.	使用者授權合約 (EULA)	24

1. 產品介紹

創見DrivePro 50行車記錄器擁有更輕巧的尺寸，整體設計簡單兼顧功能性與高性價比，提供駕駛者即時記錄車輛週遭狀況。配備f/1.8超大光圈及高品質鏡頭，無論是白天或夜晚，都能清楚實錄前方路況與車牌影像。結合130度的廣角鏡頭，提供清晰無死角的錄影範圍，並以每秒高達30張的錄製影像(30fps)，全方位錄製1080P高解析度清晰影像。DrivePro 50內建Wi-Fi功能，可透過免費下載的DrivePro App，在Apple iOS與Android系統的行動裝置上即時瀏覽、播放與下載行車影片，以及調整行車紀錄器的設定。此外，內建碰撞感應器(G-Sensor)，於行車錄影中偵測到震動或撞擊時，將會自動啟動「緊急錄影」模式，鎖定事故檔案不被覆寫。

產品特色

- 以每秒高達 30 張的錄製影像 (30fps)，全方位錄製 1080P 高解析度影像
- 內建 Wi-Fi 功能，讓你在行動裝置上操作 DrivePro 行車記錄器
- 配備 f/1.8 超大光圈及 130 度的廣角鏡頭
- 附贈創見 16GB microSD 記憶卡
- 採用高達 15Mbps 錄影位元速率的 .MOV 錄影格式
- 內建喇叭及麥克風
- 內建鋰電池

2. 系統需求

如您的電腦符合下列系統需求，方可連接 DrivePro 行車記錄器：

有 USB 埠的桌上型或筆記型電腦：

- Windows® 7
- Windows® 8
- Windows® 8.1
- Windows® 10

DrivePro App 適用於以下行動裝置：

- iOS 9.1 或更新版本 (iPhone、iPad 與 iPod touch)
- Android 4.0 或更新版本(Android 行動裝置)

3. 注意事項

下列使用步驟及安全說明非常重要，請謹慎遵行，除了確保您的行車安全之外，也可避免不正常使用造成行車記錄器的損壞。

3-1 一般使用

- 僅於車內使用。
- 為了您的安全著想，請勿於車子行進間操作本產品或使用 DrivePro App。
- 避免將 DrivePro 行車記錄器放置於過熱及高溫環境下。
- 避免將您的 DrivePro 行車記錄器及其配件淋到水或是其他液體。
- 請勿將 DrivePro 行車記錄器使用於強磁場及有劇烈震動的環境下。
- 請搭配官方傳輸線使用 DrivePro 行車記錄器。欲使用其他傳輸電源線，可能會產生相容性問題。
- 部分汽車點煙器插孔在熄火後及怠速時，依然會自動供給電源。若您的車子符合此情形，建議將 DrivePro 行車記錄器拔除，以減少電力消耗及意外發生。

3-2 安裝位置

- 切勿將機身擺放在阻礙駕駛視線或影響安全氣囊正常運作的位置。
- 建議將 DrivePro 行車記錄器固定在雨刷的運作範圍內，以確保雨天錄影的清晰度。



警告：假如您將本產品固定在有隔熱紙的車窗上，請在移除裝置時特別小心，以防止損壞隔熱紙。

3-3 資料備份

創見資訊不對任何操作上造成的資料遺失或損壞負任何責任。若您將資料儲存於您的 DrivePro 中，我們強烈建議您定期將資料備份至電腦或其他儲存設備中。

為了確保高速 USB 2.0 的資料傳輸率，請檢查該電腦是否正確安裝相對應的 USB 驅動程式。若您不確定該如何檢查，請查詢您電腦或主機板的使用手冊裡針對 USB 驅動程式有關的訊息。

4. 產品概觀

4-1 功能鍵


俯瞰圖



正面&背面圖



側面圖

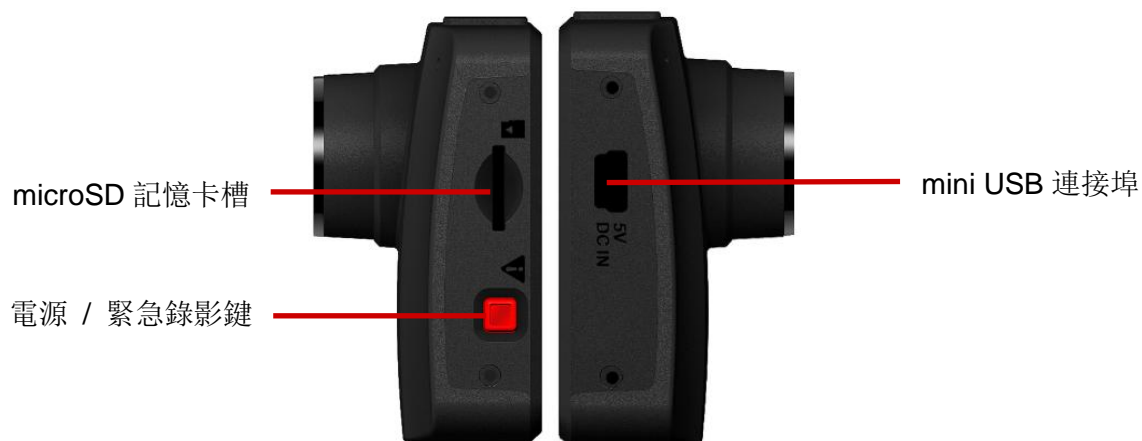

4-2 LED 指示燈

錄影中

LED	狀態	說明
	持續亮燈	停止錄影*
	閃爍	錄影中
	快速閃爍	緊急錄影**

連接電腦/電源時

LED	狀態	說明
	持續亮燈	已連接電腦
	閃爍	傳輸檔案

*當記憶卡出錯時或使用 DrivePro App 瀏覽資料或變更設定時，DrivePro 行車紀錄器會自動停止錄影。

**當緊急錄影啟動時，您會聽到一聲嗶聲。

4-3 插入記憶卡

您必須插入搭載 MLC 快閃記憶體之 microSD 記憶卡才能錄製及儲存影片。請使用 Class 10 以上且容量為 8GB、16GB、32GB 與 64GB 的記憶卡。

1. 將 microSD 記憶卡插入 DrivePro 行車紀錄器的左側記憶卡插槽。

注意：開始使用之前，請先將全新的記憶卡格式化。欲格式化記憶卡，按 DrivePro 機身上的設定鍵，選擇記憶卡格式化。

警告：



1. DrivePro™ 50 支援 FAT32 和 exFAT 檔案格式，不支援 NTFS。
2. 格式化 microSD 記憶卡時，請設定配置單位大小（Allocation Unit Size）為 32 KB。



2. 欲將記憶卡取出，請再按一次將記憶卡退出卡槽。



警告：！ 請勿在關機過程中取出記憶卡，以防記憶卡本身及資料損毀。

4-4 安裝 DrivePro 行車記錄器

1. 將車用固定架插入 DrivePro 行車記錄器上方的固定架孔，並往旁邊扣入，直到聽到喀喀聲。



2. 徹底清潔擺放 DrivePro 行車記錄器的擋風玻璃。建議最佳固定位置為前擋玻璃的中間，且接近後照鏡高度的位置。
3. 壓緊底座並按下吸盤拉桿或撕去背膠的保護膜，並固定於前擋玻璃上。



4. 將固定支架的環扣以逆時針方向轉鬆，以調整 DrivePro 行車記錄器位置。



5. 調整好位置後，以順時針方向將環扣轉緊至最底部，以確保 DrivePro 行車記錄器已完全固定。



4-5 連接電源

注意：請先插入 microSD 記憶卡，再連接 DrivePro 行車記錄器至車內點煙器插孔。



1. 將車用轉接頭的一端連接至 DrivePro 行車記錄器的 USB 接孔。
2. 將車用轉接頭的另一端連接至車內點煙器插孔。
3. 啟動車子引擎後，DrivePro 行車記錄器即自動開機錄影。

注意：初次使用請先設定日期及時間。

5. 錄影功能

啟動車子引擎後，DrivePro 行車記錄器會立即自動開機錄影。錄影時，LED 指示燈會閃爍藍色。DrivePro 行車記錄器預設三分鐘儲存一次錄影檔，如欲調整錄影檔案時間長度，請在 6-5 設定選單中調整。車子引擎熄火後，DrivePro 行車記錄器即自動儲存檔案後關機。

注意：

1. 部分汽車的點煙器插孔在熄火後及怠速時，依然會自動供給電源。如您的車子符合上述情形，建議將 DrivePro 行車記錄器拔除，以減少電力消耗及意外發生。
2. 欲使用內建電池錄影時，請先確認電池是否有足夠容量。
3. 使用 AC/DC 充電器從低電量到充滿電池，最少需要 4.5 小時(輸出：DC5V1A)。

5-1 緊急錄影

在「緊急錄影」模式下，DrivePro 可儲存相當於 30%記憶卡容量的緊急錄影檔，且所錄製的影片皆為保護檔，並不會被其他影片所覆蓋。

1. 自動緊急錄影：

在錄影過程中，請按 DrivePro 行車記錄器左側的紅色按鈕，手動啟動「緊急錄影」模式。此時螢幕上會顯示緊急錄影警告圖示。

- 若將「碰撞感應器」調至「高靈敏度」，即使是輕微震動也會啟動「緊急錄影」模式。
- 若將「碰撞感應器」調至「低靈敏度」，「緊急錄影」模式只有在劇烈的震動下才會被啟動。

碰撞感應器(G-Sensor)的靈敏度可透過 DrivePro App 設定。欲知詳細步驟，請參閱 6-5 設定選單。

2. 手動緊急錄影：

在錄影過程中，請按 DrivePro 行車記錄器底部的紅色按鈕，手動啟動「緊急錄影」模式。此時螢幕上會顯示緊急錄影警告圖示。當緊急錄影啟動時，您會聽到一聲嗶聲，同時 LED 指示燈會快速閃爍藍色。



注意：若資料夾儲存超過 30% 記憶卡容量的緊急錄影檔案，則螢幕會顯示「緊急錄影空間已滿」的訊息，此時最新的緊急錄影檔將會覆蓋最舊的緊急錄影檔。

6. 安裝 DrivePro App

DrivePro App 是一個專門為 iOS (iPhone/iPad) 和 Android 裝置開發的多媒體應用程式，提供使用者免費下載。DrivePro App 允許您以無線方式即時瀏覽行車記錄器所錄製畫面，也可透過智慧型手機或平板電腦操控 DrivePro 的功能及播放錄影檔案。

6-1 下載與安裝 App

1. 於 App Store 或 Google Play 鍵入關鍵字搜尋「DrivePro」。




2. 下載 DrivePro App 至您的手持式裝置，並進行安裝。


當完成安裝後，應用程式將會顯示在裝置的主螢幕上。開始使用 App 前，請先參閱 DrivePro 使用指南。

6-2 連線 DrivePro App

1. DrivePro 開機時，Wi-Fi 功能會自動啟動，同時 LED 指示燈會閃爍藍色。
2. 選取「DrivePro50」的 Wi-Fi 訊號 (預設密碼為 12345678)。

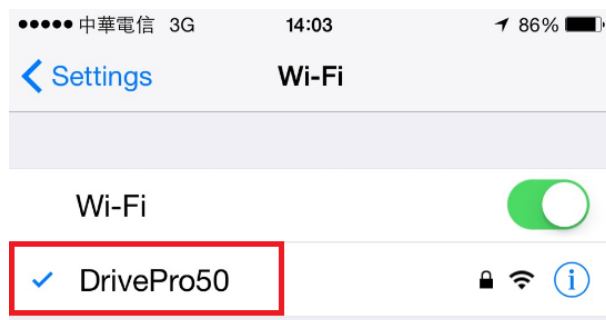

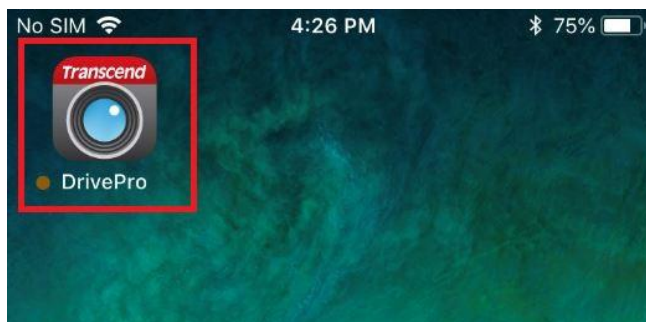

3. 點選行動裝置上的 DrivePro App。



4. 當 Wi-Fi 訊號顯示時，按”連線”。




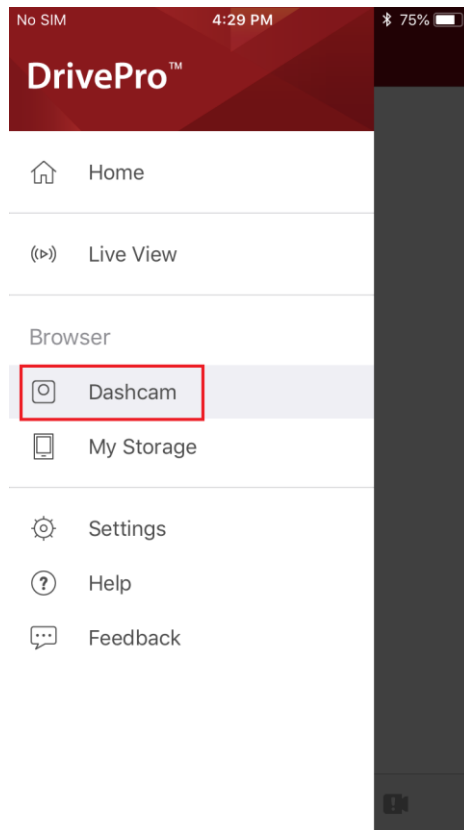
點 DrivePro™ App 的  瀏覽 /  設定鍵，即可停止錄影；同時 LED 指示燈會轉成藍色。回

復錄影，請按  Live View 鍵。


6-3 播放影片


iOS

1. 欲播放影片，請按  。





2. 選擇欲播放的影片。

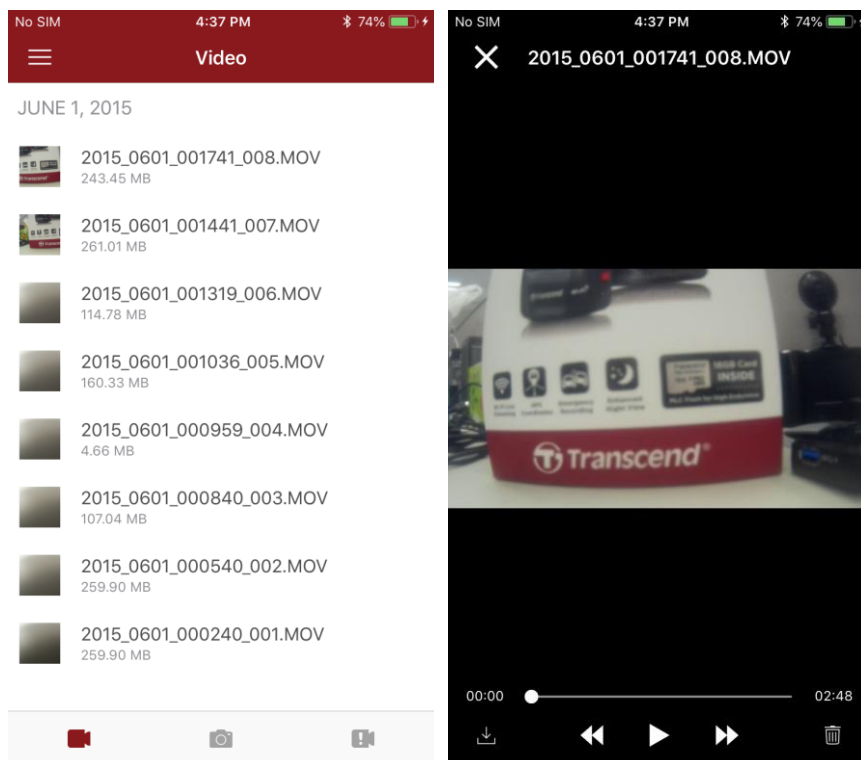


3. 欲下載影片至相機膠卷，請按 。



Android 系統

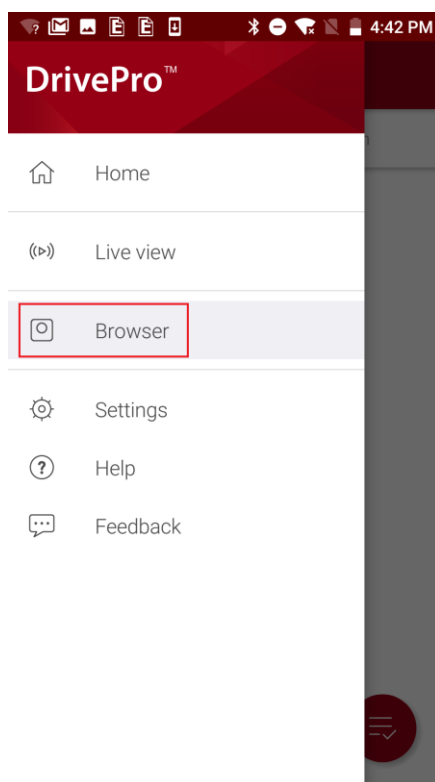
1. 欲播放影片，請按

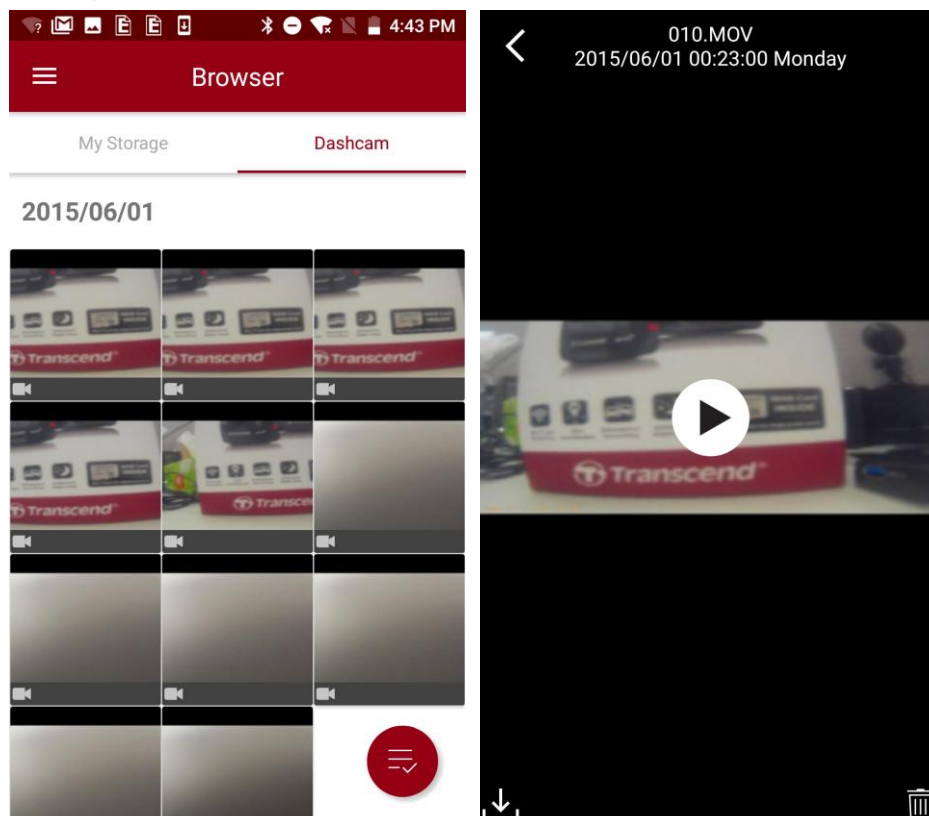


2. 選擇欲播放的影片。




請注意：使用 App 時按  或  時，會立即停止錄影。機身的 LED 指示燈會顯示成藍色。離開瀏覽或設定模式後會自動恢復錄影。

3. 欲下載影片至行動裝置，請按 。


6-4 裝置設定

按  進入裝置設定選單，使用者可自行調整影片、裝置、Wi-Fi 與系統設定。

主選單

 **解析度：** 設定錄影影像解析度。

選項：FHD / 720P

 **曝光值：** 調整錄影曝光數值。


選項：+2.0 ~ -2.0

 **影片長度：** 設定影片錄製長度。


選項：1 分鐘 / 3 分鐘 / 5 分鐘

 **影片標記：** 顯示影像錄製時間。


選項：開啟 / 關閉

 **碰撞感應器：** 調整感測器的靈敏度。


選項：關閉 / 低 / 中 / 高

 **麥克風：** 設定錄影時開啟或關閉麥克風。


選項：開啟 / 關閉

 **螢幕自動關閉：** 設定於開始錄影後，螢幕是否在指定時間內自動關閉。

選項：永不 / 10 秒 / 30 秒

 **日期格式：** 設定目前日期格式


選項：YY/MM/DD、MM/DD/YY 或 DD/MM/YY

 **時間格式：** 設定 **24 小時制**或 **12 小時制**。

選項：開啟 (24 小時制) / 關閉 (12 小時制)

 **SSID：** 輸入 **SSID** 可無線連線到 DrivePro™ 50（預設 SSID 為 DrivePro 50）。

請注意：變更 SSID 後，重新連上 Wi-Fi 也會自動更新。

 **密碼：** 設定 DrivePro™ 50 連線密碼（預設密碼為 12345678）。

請注意：變更 SSID 後，重新連上 Wi-Fi 也會自動更新。



格式化 SD 卡： 格式化 SD 記憶卡。



韌體版本：將 DrivePro 連接至電源。點擊更新韌體至最新版本。

警告：韌體升級過程中，請勿拔除 microSD 記憶卡與電源線。



1. 韌體升級過程中，DrivePro™ 將會自動關機，LED 指示燈會閃爍紅燈；韌體升級 完成後，DrivePro™ 會自動重新開機。
2. 在韌體升級過程中無法開啟 DrivePro™ Body，請聯絡創見客服中心或技術支援部門。

7. 傳輸檔案至電腦

從 DrivePro 記憶卡傳輸檔案至您的電腦：


選項 1：取出 DrivePro 行車記錄器內的 microSD 記憶卡後，插入相容的讀卡機傳輸檔案至您的電腦。

選項 2：

1. 將 microSD 記憶卡插入 DrivePro 行車記錄器中。
2. 將傳輸線的一端連接至 DrivePro 行車記錄器的 Mini-B USB 連接埠。
3. 將傳輸線的另一端連接至桌上型或筆記型電腦上的 USB 連接埠。



請注意：DrivePro 包裝內不附贈 USB 傳輸線

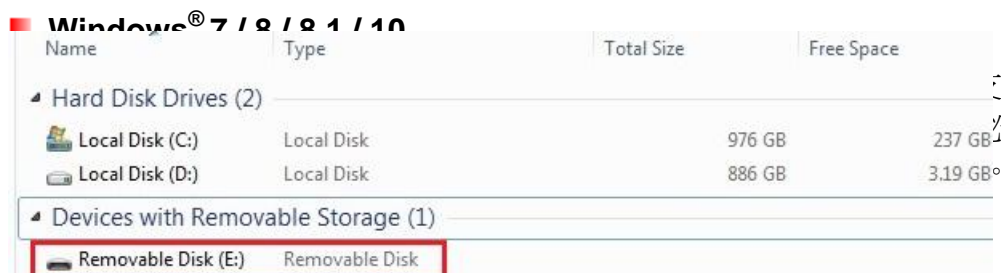


支援 DrivePro 行車記錄器。將必要檔案，此時「我的電腦」視

Name	Type	Total Size	Free Space
Hard Disk Drives (2)			
Local Disk (C:)	Local Disk	976 GB	237 GB
Local Disk (D:)	Local Disk	886 GB	3.19 GB
Devices with Removable Storage (1)			
Removable Disk (E:)	Removable Disk		

*注意: 上圖 (E:) 槽僅為範例，實際英文代碼以「我的電腦」視窗中顯示為主。

此時，您的 DrivePro 行車記錄器已經準備好傳輸資料，您可以透過拖拉的方式直接將儲存於 DrivePro 資料夾內的影片傳輸至電腦。

從 Windows 作業系統安全移除 DrivePro：

1. 點擊工具列上卸除硬碟的圖示 .
2. 「安全移除硬碟」的視窗將會跳出，請點擊後繼續。
3. 請拔除 DrivePro 行車記錄器。



警告：



1. 請按照正常流程安全卸除 DrivePro 行車記錄器，避免資料遺失。
2. DrivePro 行車記錄器連接至電腦時，僅能傳輸檔案，其他功能將無法使用。安全移除 DrivePro 行車記錄器後即可恢復正常使用。
3. DrivePro 行車記錄器連接至電腦時，即使跳出警告視窗，也請勿執行「格式化」或「初始化」的功能。

8. DrivePro Toolbox™軟體

DrivePro Toolbox 適用於 Windows 作業系統，人性化的操作介面讓使用者可以快速選擇欲播放的錄影影片，並同時觀看該影片於地圖上顯示的行駛路徑，而毋需另外安裝套件。

1. 下載安裝檔案請至: <http://tw.transcend-info.com/downloads>
2. 檔案下載完成後，請於您的桌上型電腦或筆電進行安裝。

主要特色包含:

1.快速分類影片:

您可根據檔案名稱、錄影日期或群組快速分類影片檔案。

2. 流暢播放影片:

連接 **DrivePro** 至電腦或透過可支援 **microSD** 卡的讀卡機連接至電腦，可直接在 **Windows** 作業系統上流暢播放錄製影片。

9. 包裝內容

- DrivePro 行車紀錄器



- 黏著式固定架／吸盤式固定架




- 行車紀錄器轉接器




- 16GB microSD 記憶卡



- 快速使用手冊



- 保固卡



10. 產品規格

傳輸介面	USB 2.0
儲存容量	MLC MicroSD 卡, 8GB/16GB/32GB/64GB (建議使用 Class 10 以上)
機身尺寸	55 公厘(長) × 58 公厘(寬) × 31.15 公厘(高)
機身重量	49 克(76 克含固定背夾)
車用轉接頭電壓規格	輸入 (最大) : DC10V~30V / 1A 輸出 : DC5V / 1A
電池	鋰聚合物電池 430mAh
工作溫度	-20°C (-4°F) ~ 65°C (149°F)
影像格式	.MOV (H.264 影像壓縮技術)
鏡頭	<i>f</i> /1.8 , 130°廣角
解析度/每秒顯示幀數	1920 x 1080 30fps
	1280 x 720 30fps
Wi-Fi	802.11b/g/n
安規認證	CE, FCC, BSMI, NCC, MIC
產品保固	2年有線保固
請注意	<p>1. 因行車紀錄器需要長時間密集寫入檔案，使用一般 TLC 快閃記憶體的記憶卡容易產生不穩定的情況，因此建議使用搭載 MLC 快閃記憶體的記憶卡，以確保最穩定的錄影品質。</p> <p>2. 除了附贈的 microSD 記憶卡外，必要時可另購下方所推薦的創見高耐用 microSD 記憶卡，以達到最穩定的錄影品質。</p> <ul style="list-style-type: none">● 16GB/32GB 高耐用 microSDHC 記憶卡 (TS16G/32GUSDHC10V)● 64GB 高耐用 microSDXC 記憶卡 (TS64GUSDXC10V)

**實際錄影時間將視當時情況而定。

11. 常見問題

若您在使用 DrivePro 時發生任何問題，請先參考以下資訊嘗試排除問題。若您的問題仍然無法解決，請詢問 您購買的店家、服務中心或直接與創見資訊聯絡。我們的官網 (<http://www.transcend-info.com/>) 亦提供更多 FAQ 及技術支援服務 (http://www.transcend-info.com/Support/contact_form)。硬體使用的相關問題，請參閱 DrivePro 的使用手冊。

■ 電腦作業系統無法偵測DrivePro行車記錄器

請確認以下事項：

1. 您的DrivePro是否正確的連接在USB埠上？如果不是，請重新插拔，並確認USB埠兩端正確的連接如使用者手冊所示。
2. 您的DrivePro是否連接在Mac的鍵盤上？如果是，請將DrivePro直接插入Mac主機的USB埠上。
3. 您電腦的USB埠是否已啟動？如果沒有，請參閱您電腦（或主機板）的使用手冊進行啟動。

■ 為何按下「緊急錄影」鍵時，DrivePro 無任何反應？

緊急錄影功能僅在錄影模式下才可被啟動。

■ 使用車充供電時車子熄火後，DrivePro 行車記錄器為何還繼續錄影？

部份汽車的點煙器插孔在引擎熄火後，依然會供給電源。若您的車子符合此情形，熄火後請將行車記錄器的電源從點煙器上移除，以避免不必要的電力消耗及不可預期的問題發生。

■ 當 micro SD 卡的容量已滿時，DrivePro 是否仍會繼續錄影？

DrivePro 系列行車記錄器具備循環錄影功能，當記憶卡錄滿後，會以最早的時間檔案，依時間順序從最早的文件進行覆蓋。

12. 回收和環保



Recycling the Product (WEEE): Your product is designed and manufactured with high quality materials and components, which can be recycled and reused. When you see the crossed-out wheel bin symbol attached to a product, it means that the product is covered by the European Directive 2002/96/EC:

Never dispose of your product with other household waste. Please inform yourself about the local rules on the separate collection of electrical and electronic products. The correct disposal of your old product helps prevent potential negative consequences on the environment and human health.



Battery Disposal: Your product contains a built-in rechargeable battery covered by the European Directive 2006/66/EC, which cannot be disposed of with normal household waste. Please inform yourself about the local rules on separate collection of batteries. The correct disposal of batteries helps prevent potentially negative consequences on the environment and human health.

For products with non-exchangeable built in batteries: The removal of (or the attempt to remove) the battery invalidates the warranty. This procedure is only to be performed at the end of the product's life.

CAUTION

RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE.
DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.

13. 美國聯邦通信委員會 (FCC)聲明

This device complies with Part 15 FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference. (2) This device must accept any interference received including interference that may cause undesired operation.

This Equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

RF Exposure Statement:

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator and your body.

You are cautioned that changes or modifications not expressly approved by the part responsible for compliance could void the user's authority to operate the equipment.

This Transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

14. 兩年有限保固條款

This product is covered by a Two-year Limited Warranty. Should your product fail under normal use within two years from the original purchase date, Transcend will provide warranty service pursuant to the terms of the Transcend Warranty Policy. Proof of the original purchase date is required for warranty service.

Transcend will inspect the product and in its sole discretion repair or replace it with a refurbished product or functional equivalent. Under special circumstances, Transcend may refund or credit the current value of the product at the time the warranty claim is made. The decision made by Transcend shall be final and binding upon you. Transcend may refuse to provide inspection, repair or replacement service for products that are out of warranty, and will charge fees if these services are provided for out-of-warranty products.

Limitations

Any software or digital content included with this product in disc, downloadable, or preloaded form, is not covered under this Warranty. This Warranty does not apply to any Transcend product failure caused by any accident, abuse, mishandling or improper usage (including use contrary to the product description or instructions, outside the scope of the product's intended use, or for tooling or testing purposes), alteration, abnormal mechanical or environmental condition (including prolonged exposure to humidity), acts of nature, improper installation (including connection to incompatible equipment), or problems with electrical power (including undervoltage, overvoltage, or power supply instability). In addition, damage or alteration of warranty, quality or authenticity stickers, and/or product serial or electronic numbers, unauthorized repair or modification, or any physical damage to the product or evidence of opening or tampering with the product casing will also void this Warranty. This Warranty shall not apply to the transferees of Transcend products and/or anyone who stands to profit from this Warranty without Transcend's prior written authorization. This Warranty only applies to the product itself, and excludes integrated LCD panels, rechargeable batteries, and all product accessories (such as card adapters, cables, earphones, power adapters, and remote controls).

Transcend Warranty Policy

Please visit www.transcend-info.com/warranty to view the Transcend Warranty Policy. By using the product, you agree that you accept the terms of the Transcend Warranty Policy, which may be amended from time to time.



Transcend Information, Inc.

www.transcend-info.com

*The Transcend logo is a registered trademark of Transcend Information, Inc.

*The specifications mentioned above are subject to change without notice.

*All logos and marks are trademarks of their respective companies.

15. GNU 通用公共授權條款 (GPL) 公告

Firmware incorporated into this product and/or software used for this product may include third party copyrighted software licensed under the GPL (hereinafter referred to as "GPL Software"). In accordance with the GPL, if applicable: 1) the source code for the GPL Software may be downloaded at no charge or obtained on CD for a nominal charge by calling Customer Support within three years of the date of purchase; 2) you may copy, re-distribute and/or modify the GPL Software under the terms of the GNU General Public License as below or any later version, which may be obtained at <http://www.gnu.org/licenses/gpl.html>; 3) the GPL Software is distributed WITHOUT ANY WARRANTY, without even implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. The entire risk as to the quality and performance of the GPL Software is with you. Transcend does not provide any support for the GPL software.

16. 使用者授權合約 (EULA)

Software license terms and conditions

1. Generally. Transcend Information, Inc. ("Transcend") is willing to grant the following license to install or use the software and/or firmware ("Licensed Software") pursuant to this End-User License Agreement ("Agreement"), whether provided separately or associated with a Transcend product ("Product"), to the original purchaser of the Product upon or with which the Licensed Software was installed or associated as of the time of purchase ("Customer") only if Customer accepts all of the terms and conditions of this Agreement. PLEASE READ THESE TERMS CAREFULLY. USING THE SOFTWARE WILL CONSTITUTE CUSTOMER'S ACCEPTANCE OF THE TERMS AND CONDITIONS OF THIS AGREEMENT. IF YOU DO NOT AGREE TO THE TERMS AND CONDITIONS OF THIS AGREEMENT, DO NOT INSTALL OR USE THE LICENSED SOFTWARE.

2. License Grant. Transcend grants to Customer a personal, non-exclusive, non-transferable, non-distributable, non-assignable, non-sublicensable license to install and use the Licensed Software on the Product in accordance with the terms and conditions of this Agreement.

3. Intellectual Property Rights. As between Transcend and Customer, the copyright and all other intellectual property rights in the Licensed Software are the property of Transcend or its supplier(s) or licensor(s). Any rights not expressly granted in this License are reserved to Transcend.

4. License Limitations. Customer may not, and may not authorize or permit any third party to: (a) use the Licensed Software for any purpose other than in connection with the Product or in a manner inconsistent with the design or documentations of the Licensed Software; (b) license, distribute, lease, rent, lend, transfer, assign or otherwise dispose of the Licensed Software or use the Licensed Software in any commercial hosted or service bureau environment; (c) reverse engineer, decompile, disassemble or attempt to discover the source code for or any trade secrets related to the Licensed Software, except and only to the extent that such activity is expressly permitted by applicable law notwithstanding this limitation; (d) adapt, modify, alter,

translate or create any derivative works of the Licensed Software; (e) remove, alter or obscure any copyright notice or other proprietary rights notice on the Licensed Software or Product; or (f) circumvent or attempt to circumvent any methods employed by Transcend to control access to the components, features or functions of the Product or Licensed Software.

5. Copying. Customer may not copy the Licensed Software except that one copy of any separate software component of the Licensed Software may be made to the extent that such copying is necessary for Customer's own backup purposes.

6. Open Source. The Licensed Software may contain open source components licensed to Transcend pursuant to the license terms specified as below,

- (a) GNU General Public License (GPL), the terms of which is currently available at <http://www.gnu.org/licenses/gpl.html> ;
- (b) GNU Lesser General Public License (LGPL), the terms of which is currently available at <http://www.gnu.org/copyleft/lesser.html> ; and/or
- (c) Code Project Open License (CPOL), the terms of which is currently available at <http://www.codeproject.com/info/cpol10.aspx>

The above license terms will control solely with respect to the open source components. In the event that this Agreement conflicts with the requirements of the above one or more terms with respect to the use of the corresponding open source components, Customer agrees to be bound by such one or more license terms.

7. Disclaimer. TRANSCEND MAKES NO WARRANTY AND REPRESENTATIONS ABOUT THE SUITABILITY, RELIABILITY, AVAILABILITY, TIMELINESS, LACK OF VIRUSES OR OTHER HARMFUL COMPONENTS AND ACCURACY OF THE INFORMATION, LICENSED SOFTWARE, PRODUCTS, SERVICES AND RELATED GRAPHICS CONTAINED WITHIN THE LICENSED SOFTWARE FOR ANY PURPOSE. ALL SUCH INFORMATION, LICENSED SOFTWARE, PRODUCTS, SERVICES AND RELATED GRAPHICS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND. TRANSCEND HEREBY DISCLAIMS ALL WARRANTIES AND CONDITIONS WITH REGARD TO THIS INFORMATION, LICENSED SOFTWARE, PRODUCTS, SERVICES AND RELATED GRAPHICS, INCLUDING ALL IMPLIED WARRANTIES AND CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, WORKMANLIKE EFFORT, TITLE, AND NON-INFRINGEMENT.

IN NO EVENT SHALL TRANSCEND BE LIABLE FOR ANY DIRECT, INDIRECT, PUNITIVE, INCIDENTAL, SPECIAL, CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF USE, DATA OR PROFITS, ARISING OUT OF OR IN ANY WAY CONNECTION WITH THE USE, PERFORMANCE OR ACCURACY OF THE LICENSED SOFTWARE OR WITH THE DELAY OR INABILITY TO USE THE LICENSED SOFTWARE, OR THE PRODUCT WITH WHICH THE LICENSED SOFTWARE IS ASSOCIATED, WHETHER BASED ON CONTRACT, TORT, NEGLIGENCE, STRICT LIABILITY OR OTHERWISE, EVEN IF TRANSCEND HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

8. Limitation of Liability. IN ANY CASE, TRANSCEND 'S LIABILITY ARISING OUT OF OR IN CONNECTION WITH THIS AGREEMENT WILL BE LIMITED TO THE TOTAL AMOUNT ACTUALLY AND ORIGINALLY PAID AT RETAIL BY CUSTOMER FOR THE PRODUCT. The foregoing Disclaimer and

Limitation of Liability will apply to the maximum extent permitted by applicable law. Some jurisdictions do not allow the exclusion or limitation of incidental or consequential damages, so the exclusions and limitations set forth above may not apply.

9. Termination. Transcend may, in addition to any other remedies available to Transcend, terminate this Agreement immediately if Customer breaches any of its obligations under this Agreement.

10. Miscellaneous. (a) This Agreement constitutes the entire agreement between Transcend and Customer concerning the subject matter hereof, and it may only be modified by a written amendment signed by an authorized executive of Transcend. (b) Except to the extent applicable law, if any, provides otherwise, this Agreement will be governed by the law of the Republic of China, excluding its conflict of law provisions. (c) If any part of this Agreement is held invalid or unenforceable, and the remaining portions will remain in full force and effect. (d) A waiver by either party of any term or condition of this Agreement or any breach thereof, in any one instance, will not waive such term or condition or any subsequent breach thereof. (e) Transcend may assign its rights under this Agreement without condition. (f) This Agreement will be binding upon and will inure to the benefit of the parties, their successors and permitted assigns.